POWER / MANUAL REWIND REELS

NORDIC SERIES 3700

2" Fluid Path for 1½" through 2" I.D. Hose

REWIND: Gear-drive crank rewind or chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

INLET: 2" straight victaulic is standard. 2" male NPT straight swivel joint may be specified at no extra cost. 2" victaulic 90° available at extra cost.

GOOSENECK: 2" female/male NPT. Other sizes and/or threads can be furnished and must be specified.

Product temperatures from -60° to +174°F and standard pressures to 300 p.s.i. Other temperatures or pressures can be furnished at extra cost. Consult manufacturer.

Series 3700

The standard color for this series is red or gray.
ADD 12" to E dimension when crank is in rewind position.

Note: Weights shown in chart are for crank rewind models.

Add these amounts and model number prefix for power rewind models.

Prefix	Type	LB / KG
EP	Electric	42 / 19
A	Air	26 / 12
H	Hyd	26 / 12

DIMENSIONS DIAGRAM

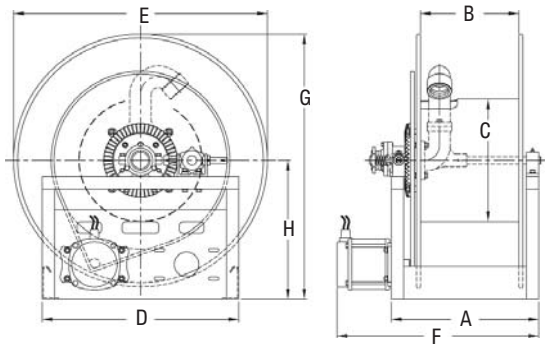

SPECIFICATIONS - HOSE CAPACITY AND REEL DIMENSIONS

HOSE I.D.	in	1 1/2	2
	mm	38	51
HOSE O.D.	in	2 1/16	2 9/16
	mm	52	65

MODEL	HOSE LENGTH		EST. WEIGHT	A	B	C	D	E CRK	E ELC	E AIR	E HYD	F CRK	F ELC	F AIR	F HYD	G	H
3700-23-20	ft	65	25	114 LB	26	20	15	21	23	23	24	23	30	33	30	32	24½	13
	m	20	8	52 KG	660	508	381	533	584	584	610	584	762	838	762	813	622	330
3700-25-20	ft	65	55	124 LB	26	20	15	21	25	25	25	25	30	33	30	32	26½	14
	m	20	17	56 KG	660	508	381	533	635	635	635	635	762	838	762	813	673	356
3700-25-24	ft	80	65	128 LB	30	24	15	21	25	25	25	25	34	37	34	36	26½	14
	m	24	20	58 KG	762	610	381	533	635	635	635	635	864	940	864	914	673	356
3700-25-32	ft	115	90	136 LB	38	32	15	21	25	25	25	25	42	45	42	44	26½	14
	m	35	27	62 KG	965	813	381	533	635	635	635	635	1067	1143	1067	1118	673	356
3700-31-12	ft	90	50	134 LB	18	12	15	24	31	31	31	31	22	25	22	24	32½	17
	m	27	15	61 KG	457	305	381	610	787	787	787	787	559	635	559	610	826	432
3700-31-20	ft	165	90	142 LB	26	20	15	24	31	31	31	31	30	33	30	32	32½	17
	m	50	27	64 KG	660	508	381	610	787	787	787	787	762	838	762	813	826	432
3700-31-26	ft	220	125	148 LB	32	26	15	24	31	31	31	31	36	39	36	38	32½	17
	m	67	38	67 KG	813	660	381	610	787	787	787	787	914	991	914	965	826	432
3700-39-16	ft	225	140	182 LB	22	16	15	24	39	39	39	39	26	29	26	28	40½	21
	m	69	43	83 KG	559	406	381	610	991	991	991	991	660	737	660	711	1029	533
3700-39-24	ft	350	220	190 LB	30	24	15	24	39	39	39	39	34	37	34	36	40½	21
	m	107	67	86 KG	762	610	381	610	991	991	991	991	864	940	864	914	1029	533

Refer to page 31 to build a complete model number.