

Lever type



The tough high pressure cast iron head makes Pro-Master Grease Guns unique in comparison to common pot metal or other die cast heads with a head burst pressure of 17,000 PSI (1200 Bar).

Easy to maintain original pressure and delivery under the hardest working conditions. Delivers .1 ounce per stroke with 7,100 PSI counter pressure.

Heavy duty knurled steel barrel with large threads for easy loading.

Locking follower rod, heavy duty spring, heavy duty beveled rubber follower, no conversion needed for various filling.

Use standard 14 oz. cartridge or 16 oz. bulk grease.

Model 1200

Standard Series

- Heavy duty cast iron head, with port for optional filler nipple.
- Curved outlet pipe and coupler with ball check and hardened jaws.
- Heavy duty barrel with large threads and o'ring seal.
- Heavy duty rod, spring and follower.
- Rugged baked enamel finish.

Model 1200



Model 1205

Deluxe Series

Has all the features of model 1200 plus:

- Filler nipple for 3-way loading.
- Vinyl handle grip.

Model 1205



Model 1206 (Not shown)

Same as 1205 except with flex hose instead of outlet pipe.

Model 1210

Professional Series

Has all the features of Model 1205 plus:

- Variable stroke cast iron head.
- Air bleeder valve.
- Removable valve checks for ease of maintenance.
- Metallic baked finish.
- Zinc plated lever handle and linkage.

Model 1210



Model 1212 (Not shown)

Professional Series

Has all features of Model 1210 plus:

- 360° adjustable outlet pipe, locks in any position.

Suction gun

Model 1225

Professional Series

- Clear vinyl flex hose with removable holding clip.
- Heavy duty, double lipped follower.
- Heavy duty 16 oz. capacity, knurled barrel.
- Large positive pull handle.
- Metallic baked finish.

Model 1225



Pistol type

Model 1220



Model 1220

Deluxe Series

- Heavy duty high pressure cast iron head.
- Straight outlet pipe and coupler with ball check and hardened jaws.
- Head has port for optional filler nipple.
- Heavy duty barrel with large threads and o'ring seal.
- Heavy duty rod, spring and follower.
- One hand action for hard to reach fittings.
- Positive vinyl handle grip.
- Rugged baked enamel finish.

Model 1221 (Not shown)

Same as 1220 except with flex hose instead of outlet pipe.

Model 1222



Model 1222

Professional Series

Has all the features of Model 1220 Plus:

- Removable valve checks for ease of maintenance.
- Air bleeder valve.
- Filler nipple for 3-way loading.
- Metallic baked finish.
- Zinc plated handle and linkage.

Model 1227 (Not shown)

Same as 1222 except with flex hose.

Air operated

Model 1230



Model 1230

Standard Series

- 40 to 1 ratio air motor
- Filler nipple for 3-way loading
- Air bleeder valve
- Curved outlet pipe and coupler
- Baked enamel and zinc plate finish

Model 1233



Model 1233

Professional Series

- 60 to 1 ratio air motor
- Combination bleeder valve and filler nipple
- 3-way loading
- Heavy duty rod, spring and follower
- Curved outlet pipe and coupler with ball check and hardened jaws
- Heavy duty barrel with large threads and o'ring seal
- Metallic baked finish

Model 1235




Model 1235

Special Industrial Series

- 60 to 1 ratio air motor
- Unique, exclusive air powered follower plate, ideal for heavy greases
- Large 33 1/2 oz. capacity heavy duty knurled barrel
- Filler nipple for 2-way loading
- Wire braid flex hose extension and coupler with hardened jaws
- Metallic baked finish


Quick air couplers and nipples

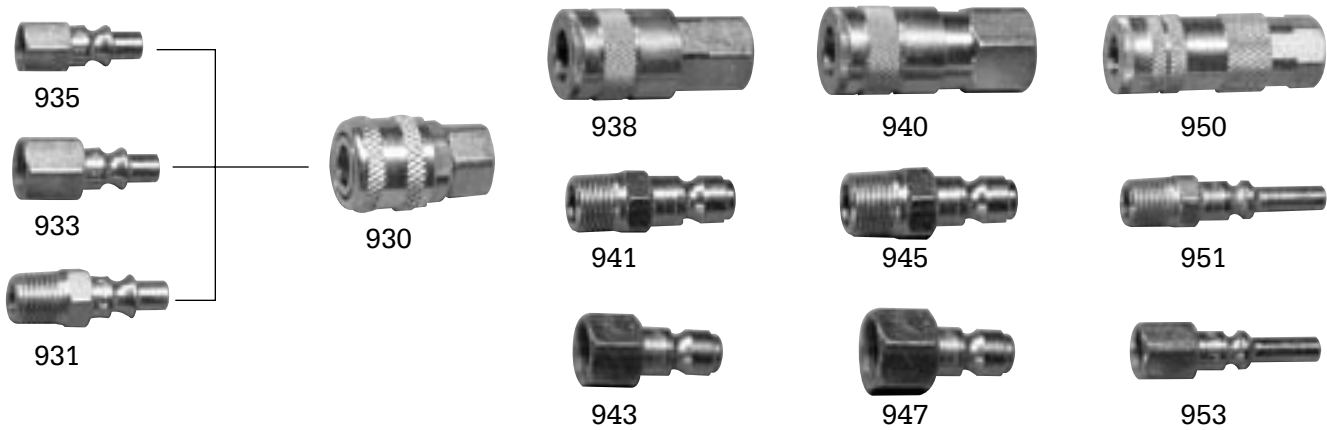

Model	Description	
930	Swivel coupler - 1/4" FPT	A
931	Insert nipple - 1/4" MPT	A
933	Insert nipple - 1/4" FPT	A
935	Insert nipple - 1/8" MPT	A
938	Swivel coupler - 3/8" FPT	I
940	Swivel coupler - 1/2" FPT	I
941	Insert nipple - 3/8" MPT	I


Model	Description	
943	Insert nipple - 3/8" FPT	I
945	Insert nipple - 1/2" MPT	I
947	Insert nipple - 1/2" FPT	I
950	Swivel coupler - 1/4" FPT	LS
951	Insert nipple - 1/4" MPT	LS
953	Insert nipple - 1/4" FPT	LS

Brass pump oilers

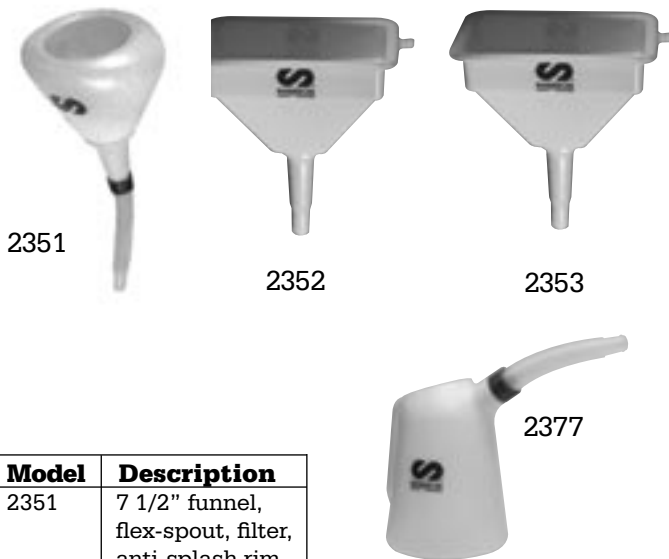


Model	Description
2351	7 1/2" funnel, flex-spout, filter, anti-splash rim, fingergrip
2352	Large heavy duty funnel with regular filter
2353	Large heavy duty funnel with diesel filter
2377	5 quart flex-spout measure, quart and liter calibration

Plastic funnels and measures

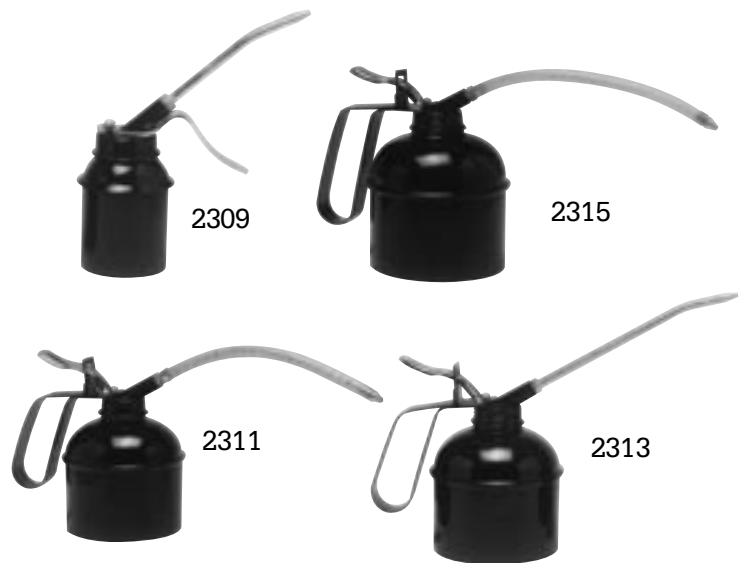


Model	Description
2309	1/2 pint brass pump, steel can, flex spout
2311	1 pint brass pump, steel can, flex spout
2313	1 1/2 pint brass pump, steel can, flex spout
2315	1 quart brass pump, steel can, flex spout

Grease Whip hose Wire braid hose, 3000 PSI working, 12,000 PSI burst

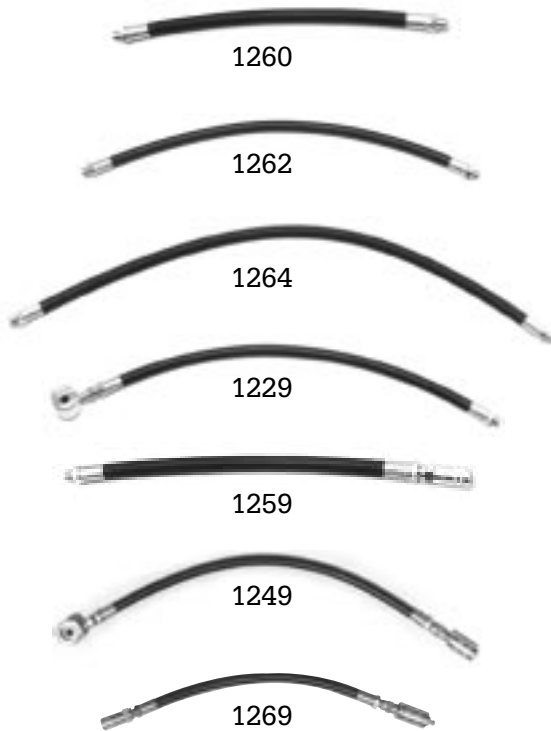

Model	Description
1260	12" length - 1/8" NPTM both ends
1262	18" length - 1/8" NPTM both ends
1264	24" length - 1/8" NPTM both ends
1229	18" whip hose with giant buttonhead coupler
1249	18" whip hose with giant buttonhead coupler and lock sleeve
1259	12" whip hose with 4 jaw narrow coupler
1269	12" whip hose with 4 jaw coupler and lock


H.D. high pressure machine oilers

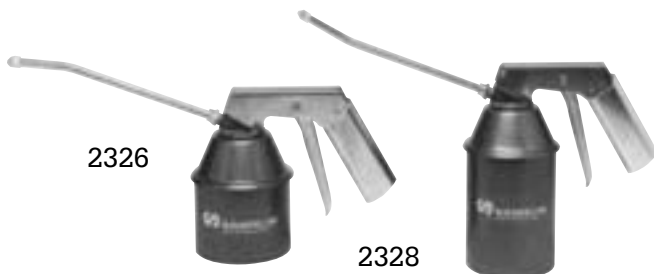

Model	Description
2326	1 pint, heavy duty, high pressure, cast iron pump with filter screen, rigid spout
2328	1 1/2 pint heavy duty high pressure, cast iron pump with filter screen, rigid spout


Outlet pipes and couplers

For use with hand operated equipment only

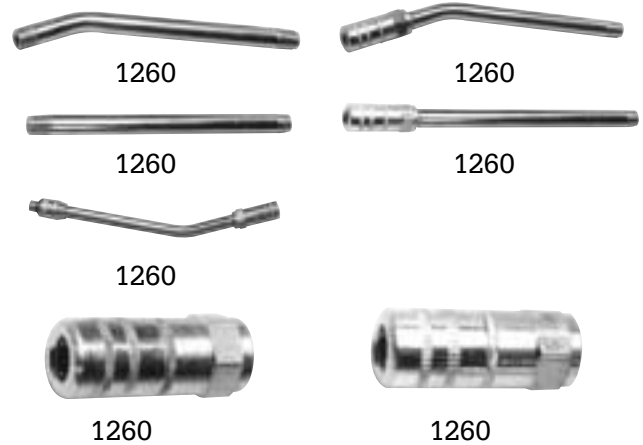


Model	Description
1201	6" curved outlet pipe - 1/8" NPTM both ends
1202	6" curved pipe with 4 jaw narrow coupler
1203	6" straight outlet pipe - 1/8" NPTM both ends
1204	6" straight pipe with 4 jaw narrow coupler
1211	6" curved pipe with 4 jaw coupler with 360° adjustable, lockable outlet nut
1223	3 jaw narrow coupler - 1/8" NPTF
1224	4 jaw narrow coupler - 1/8" NPTF

Buttonhead fittings

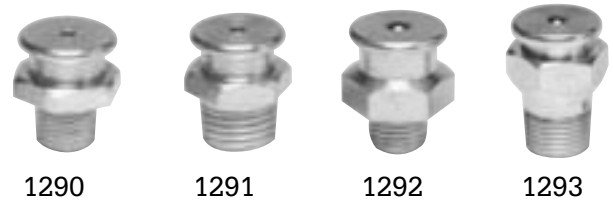

Model	Description
1290	Standard - 1/8" MPT
1291	Standard - 1/4" MPT
1292	Giant - 1/4" MPT
1293	Giant - 3/8" MPT

Air/Fluid service

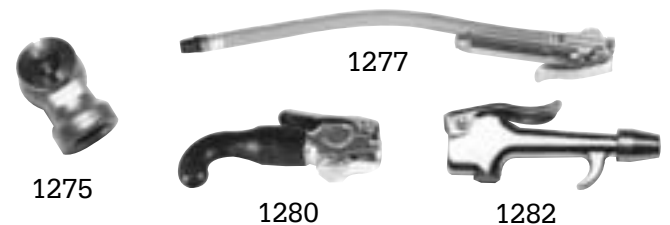

Model	Description
1275	Air chuck - 1/4" FPT
1277	Inflator gauge - 1/4" FPT
1280	Water bibb - 1/4" FPT
1282	Air blow gun - 1/4" FPT

Barrel Pumps

Heavy duty, high quality hand operated transfer pumps. A selection of hand operated lever, lift, siphon and rotary models available for light, medium and heavier automotive, petroleum and industrial products.

Model 1240



Model 1240

Lever action barrel pump. Steel pump body, spout and telescopic suction tube. Die cast head, steel piston, brass rings nitrile rubber seals. Bung threads fits 15-55 gallon drums. Ideal for use with automotive and petroleum light lubricants and other non-corrosive fluids.

Model 1243



Model 1243

Same features as Model 1240 plus: A larger pump body with longer stroke piston. Has Viton® seals, useable with alcohols, detergents, solvents, oils and anti-freeze. Long curved removable steel spout with garden hose threads.

Model 1239



Model 1239

Quart stroke pump. Adjustable, for dispensing lubricating oils and other non-corrosive fluids. Aluminum casting with Delrin® molded piston. Bung threads, fit 15-55 gallon drum with telescoping suction tube. Swing return drain tube and lockable crank arm.

Model 1244



Model 1244

Lever action siphon pump. Design allows transfer by siphon once the pump has been primed, giving a continuous flow of two gal./min. Bung threads fits 15-55 gallon drums. With 3' clear delivery hose, metal nozzle and PVC suction tube. For anti-freeze, light mineral oil, diesel, detergent and other automotive and petroleum light fluids.

Model 1245



Model 1245

Rotary barrel pump. Heavy duty cast iron body, telescopic steel suction tube, adjustable bung fits 15-55 gallon drums. Dispenses fuel oils, kerosene, diesel fuel, oils and other light fluids.

Model 1247



Model 1247

Constructed of nylon, stainless steel and special packings. Fits 15-55 gallon drums with a 2-inch bung opening. Spout can be removed and special hose attached. Dispenses strong chemicals and solvents at approximately 8 oz. per stroke.